

Product Selection  
Non-reversing Contactors

EATON Contactors / Moeller Series

KMParts.com



(866)595-9616

34



Frame B



Frame C



Frame D



Frame F

Table 34-49. Full Voltage Non-reversing 3-Pole Contactors, Frame B – Frame G

UL/CSA Ratings								IEC Ratings				Aux. Contacts				Catalog Number — Screw Terminals ①②		Price U.S. \$	
UL General Purpose Amp Rating	1-Phase hp Ratings			3-Phase hp Ratings				AC-3 I <sub>e</sub> (A)	AC-1 (40°C) I <sub>e</sub> = I <sub>th</sub> (A)	Maximum kW Ratings AC-3 3-Phase Motors 50 – 60 Hz				1NO	1NC	1NO-1NC	—	AC Coil	DC Coil
	115V	200V	230V	200V	230V	460V	575V			220/230V	380/400V	415V	660/690V						
<b>Frame B</b>																			
20	1/4	3/4	1	1-1/2	2	3	5	7	22	2.2	3	4	3.5	1NO	—	—	—	—	—
20	1/4	3/4	1	1-1/2	2	3	5	7	22	2.2	3	4	3.5	1NC	—	—	—	—	—
20	1/2	1	1-1/2	3	3	5	7-1/2	9	22	2.5	4	5.5	4.5	1NO	—	—	—	—	—
20	1/2	1	1-1/2	3	3	5	7-1/2	9	22	2.5	4	5.5	4.5	1NC	—	—	—	—	—
20	1	2	3	5	5	10 <sup>③</sup>	10	12	22	3.5	5.5	7	6.5	1NO	—	—	—	—	—
20	1	2	3	5	5	10 <sup>③</sup>	10	12	22	3.5	5.5	7	6.5	1NC	—	—	—	—	—
20	1	2	3	5	5	10 <sup>③</sup>	10	15.5	22	4	7.5	8	7	1NO	—	—	—	—	—
20	1	2	3	5	5	10 <sup>③</sup>	10	15.5	22	4	7.5	8	7	1NC	—	—	—	—	—
<b>Frame C</b>																			
40	2	2	3	5	5	10 <sup>③</sup>	15	18	40	5	7.5	10	11	1NO	—	—	—	—	—
40	2	2	3	5	5	10 <sup>③</sup>	15	18	40	5	7.5	10	11	1NC	—	—	—	—	—
40	2	3	5	7-1/2	10	15	20	25	45	7.5	11	14.5	14	1NO	—	—	—	—	—
40	2	3	5	7-1/2	10	15	20	25	45	7.5	11	14.5	14	1NC	—	—	—	—	—
40	3	5	5	10	10	20	25	32	45	10	15	18	17	1NO	—	—	—	—	—
40	3	5	5	10	10	20	25	32	45	10	15	18	17	1NC	—	—	—	—	—
<b>Frame D</b>																			
63	3	5	7-1/2	10	15	30	40	40	60	12.5	18.5	24	23	—	—	—	—	—	—
63	3	5	7-1/2	10	15	30	40	40	60	12.5	18.5	24	23	1NO-1NC	—	—	—	—	—
80	3	7-1/2	10	15	20	40	50	50	80	15.5	22	30	30	—	—	—	—	—	—
80	3	7-1/2	10	15	20	40	50	50	80	15.5	22	30	30	1NO-1NC	—	—	—	—	—
88	5	10	15	20	25	50	60	65	98	20	30	39	35	—	—	—	—	—	—
88	5	10	15	20	25	50	60	65	98	20	30	39	35	1NO-1NC	—	—	—	—	—
88	5	10	15	20	25	50	60	72	98	22	37	41	35	—	—	—	—	—	—
88	5	10	15	20	25	50	60	72	98	22	37	41	35	1NO-1NC	—	—	—	—	—
<b>Frame F</b>																			
125	7-1/2	15	15	25	30	60	75	80	110	25	37	48	63	—	—	—	—	—	—
125	7-1/2	15	15	25	30	60	75	80	110	25	37	48	63	1NO-1NC	—	—	—	—	—
125	7-1/2	15	15	25	40	75	100	95	130	30	45	57	75	—	—	—	—	—	—
125	7-1/2	15	15	25	40	75	100	95	130	30	45	57	75	1NO-1NC	—	—	—	—	—
<b>Frame G</b>																			
160	10	25	25	40	50	100	100	115	160	37	55	70	90	—	—	—	—	—	—
160	10	25	25	40	50	100	100	115	160	37	55	70	90	1NO-1NC	—	—	—	—	—
180	10	25	30	40	60	125	125	150	190	48	75	91	96	—	—	—	—	—	—
180	10	25	30	40	60	125	125	150	190	48	75	91	96	1NO-1NC	—	—	—	—	—
225 <sup>④</sup>	10	25	30	40	60	125	125	170	275 <sup>⑤</sup>	52	90	100	96	—	—	—	—	—	—
225 <sup>④</sup>	10	25	30	40	60	125	125	170	275 <sup>⑤</sup>	52	90	100	96	1NO-1NC	—	—	—	—	—

① Underscore ( \_ ) indicates magnet coil suffix required. See Table 34-58, Page 34-38.  
 ② For Spring Cage Terminals, insert **C** after the fourth digit of the Catalog Number. Example: XTCEC007B10A. For 7 – 12A XTCEC Contactors, the power, auxiliary and coil terminals are spring cage. For 18 – 32A XTCEC Contactors, the auxiliary and coil terminals are spring cage. For 40 – 150A XTCEC Contactors, the coil terminals only are spring cage.  
 ③ For electrical life contactor application data, see Table 34-51, Page 34-35.  
 ④ For 180 – 225A, use 2 x 3/0 AWG wire.  
 ⑤ For 225 – 275A, use 2 x 70 mm<sup>2</sup> wire.

**Notes:**  
 The 7 – 32A XTCE Contactors have positively driven contacts between the integrated auxiliary contact and the auxiliary contact module as well as within the auxiliary contact modules.  
 The 40 – 65A XTCE Contactors have positively driven contacts within the auxiliary contact module. 6 auxiliary contacts are possible with a combination of side mounted and front mount auxiliary contacts.  
 DC operated contactors (Frames B – G, 7 – 150A) have a built-in suppressor circuit.

Frame B – C contactors with 1NC built-in auxiliary are mirror contacts (XTCE...B01\_ – XTCE...C01\_).

Contact Sequence (Circuit Symbols) ..... Page 34-35  
 Coil Voltage Chart ..... Page 34-38  
 Accessories ..... Page 34-49  
 Dimensions ..... Page 34-91  
 Overload Relays ..... Page 34-104  
 Discount Symbol ..... 1CD7

**Contactors and Starters**

34


**Table 34-58. Magnet Coil Suffix**

Coil Voltage	Suffix Code
<b>Frame A – B</b>	
110V 50 Hz, 120V 60 Hz	<b>A</b>
220V 50 Hz, 240V 60 Hz	<b>B</b>
230V 50 Hz	<b>F</b>
24V 50/60 Hz	<b>T</b>
24V DC	<b>TD</b>
415V 50 Hz, 480V 60 Hz	<b>C</b>
550V 50 Hz, 600V 60 Hz	<b>D</b>
208V 60 Hz	<b>E</b>
190V 50 Hz, 220V 60 Hz	<b>G</b>
240V 50 Hz, 277V 60 Hz	<b>H</b>
380V 50 Hz, 440V 60 Hz	<b>L</b>
400V 50 Hz	<b>N</b>
380V 60 Hz	<b>P</b>
12V 50/60 Hz	<b>R</b>
24V 50 Hz	<b>U</b>
42V 50 Hz, 48V 60 Hz	<b>W</b>
48V 50 Hz	<b>Y</b>
120V DC	<b>AD</b>
220V DC	<b>BD</b>
12V DC	<b>RD</b>
48V DC	<b>WD</b>

Coil Voltage	Suffix Code
<b>Frame C – F</b>	
110V 50 Hz, 120V 60 Hz	<b>A</b>
220V 50 Hz, 240V 60 Hz	<b>B</b>
230V 50 Hz	<b>F</b>
24V 50/60 Hz	<b>T</b>
24 – 27V DC	<b>TD</b>
415V 50 Hz, 480V 60 Hz	<b>C</b>
550V 50 Hz, 600V 60 Hz	<b>D</b>
208V 60 Hz	<b>E</b>
190V 50 Hz, 220V 60 Hz	<b>G</b>
240V 50 Hz, 277V 60 Hz	<b>H</b>
380V 50 Hz, 440V 60 Hz	<b>L</b>
400V 50 Hz	<b>N</b>
380V 60 Hz	<b>P</b>
12V 50/60 Hz	<b>R</b>
24V 50 Hz	<b>U</b>
42V 50 Hz, 48V 60 Hz	<b>W</b>
48V 50 Hz	<b>Y</b>
110 – 130V DC	<b>AD</b>
200 – 240V DC	<b>BD</b>
12 – 14V DC	<b>RD</b> ①
48 – 60V DC	<b>WD</b>

Coil Voltage	Suffix Code
<b>Frame G</b>	
100 – 120V 50/60 Hz	<b>A</b>
190 – 240V 50/60 Hz	<b>B</b>
24V 50/60 Hz	<b>T</b>
24 – 27V DC	<b>TD</b>
480 – 500V 50/60 Hz	<b>C</b>
380 – 440V 50/60 Hz	<b>L</b>
42 – 48V 50/60 Hz	<b>W</b>
110 – 130V DC	<b>AD</b>
200 – 240V DC	<b>BD</b>
48 – 60V DC	<b>WD</b>
<b>Frame L – N</b>	
110 – 250V 40 – 60 Hz/DC	<b>A</b>
250 – 500V 40 – 60 Hz	<b>C</b>
48 – 110V 40 – 60 Hz/DC	<b>Y</b>
24 – 48V DC	<b>TD</b> ②
<b>Frame L – M, S-Series</b>	
110 – 120V 50/60 Hz	<b>A</b>
220 – 240V 50/60 Hz	<b>B</b>
<b>Frame P – R</b>	
220 – 250V 50 – 60 Hz/DC	<b>B</b>

① Frame C – D only.  
② Frame L – M only.

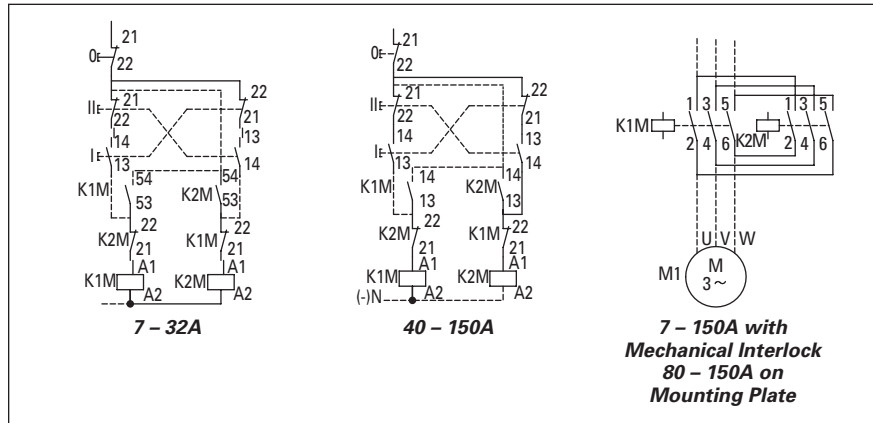

**Figure 34-34. 7 – 150A XTGR Reversing Contactor Wiring Diagram**



**KMParts.com**

**IN STOCK!!**  
**SAME DAY SHIPPING**

**(866)595-9616**

Accessories ..... **Page 34-49**  
Dimensions ..... **Page 34-91**  
Overload Relays ..... **Page 34-104**

**Catalog Number Selection**

Table 34-48. XTIEC Contactors & Starters — Catalog Numbering System

<b>XT CE C 007 B 01 AD P16</b>																																																
<table border="1"> <tr> <td><b>Designation</b></td> </tr> <tr> <td>XT = XT Line of IEC Control</td> </tr> </table>			<b>Designation</b>	XT = XT Line of IEC Control																																												
<b>Designation</b>																																																
XT = XT Line of IEC Control																																																
<table border="1"> <tr> <td><b>Type</b></td> </tr> <tr> <td>CE = 3-Pole FVNR IEC Contactor CS = 3-Pole FVNR S Series IEC Contactor CF = 4-Pole FVNR IEC Contactor CR = 3-Pole FVR IEC Contactor CC = IEC Capacitor Contactor AE = FVNR IEC Starter AS = FVNR S-Series IEC Starter AR = FVR IEC Starter</td> </tr> </table>			<b>Type</b>	CE = 3-Pole FVNR IEC Contactor CS = 3-Pole FVNR S Series IEC Contactor CF = 4-Pole FVNR IEC Contactor CR = 3-Pole FVR IEC Contactor CC = IEC Capacitor Contactor AE = FVNR IEC Starter AS = FVNR S-Series IEC Starter AR = FVR IEC Starter																																												
<b>Type</b>																																																
CE = 3-Pole FVNR IEC Contactor CS = 3-Pole FVNR S Series IEC Contactor CF = 4-Pole FVNR IEC Contactor CR = 3-Pole FVR IEC Contactor CC = IEC Capacitor Contactor AE = FVNR IEC Starter AS = FVNR S-Series IEC Starter AR = FVR IEC Starter																																																
<table border="1"> <tr> <td><b>Terminations</b></td> </tr> <tr> <td>Blank = Screw Terminals (6 – 65A); 5 mm (80 – 150A); No Lugs (185 – 2000A) Spring Cage Terminals C = (6 – 32A); Spring Cage Coil Terminals Only (185 – 500A)</td> </tr> </table>			<b>Terminations</b>	Blank = Screw Terminals (6 – 65A); 5 mm (80 – 150A); No Lugs (185 – 2000A) Spring Cage Terminals C = (6 – 32A); Spring Cage Coil Terminals Only (185 – 500A)																																												
<b>Terminations</b>																																																
Blank = Screw Terminals (6 – 65A); 5 mm (80 – 150A); No Lugs (185 – 2000A) Spring Cage Terminals C = (6 – 32A); Spring Cage Coil Terminals Only (185 – 500A)																																																
<table border="1"> <tr> <td><b>Current Ratings, AC-3</b></td> <td><b>Frame Size Designation</b></td> <td><b>Built-In Auxiliary Contact</b></td> </tr> <tr> <td>007 = 7A 009 = 9A 012 = 12A 015 = 15A</td> <td>B = 45 mm</td> <td>01 = 1NC 10 = 1NO</td> </tr> <tr> <td>018 = 18A 025 = 25A 032 = 32A</td> <td>C = 45 mm</td> <td></td> </tr> <tr> <td>040 = 40A 050 = 50A 065 = 65A 072 = 72A</td> <td>D = 55 mm</td> <td>00 = 0NO-0NC S1 = 1NO-1NC Side-mount Auxiliary S2 = 2NO-2NC Side-mount Auxiliary</td> </tr> <tr> <td>080 = 80A 095 = 95A</td> <td>F = 90 mm</td> <td>11 = 1NO-1NC Top-mount Auxiliary</td> </tr> <tr> <td>115 = 115A 150 = 150A 170 = 170A</td> <td>G = 90 mm</td> <td></td> </tr> <tr> <td>185 = 185A 225 = 225A 250 = 250A</td> <td>L = 140 mm</td> <td>22 = 2NO-2NC</td> </tr> <tr> <td>300 = 300A 400 = 400A 500 = 500A 570 = 580A</td> <td>M = 160 mm</td> <td></td> </tr> <tr> <td>580 = 580A 650 = 650A 750 = 750A 820 = 820A C10 = 1000A</td> <td>N = 250 mm</td> <td></td> </tr> <tr> <td>C14 = 1400A, AC-1</td> <td>P = 260 mm</td> <td></td> </tr> <tr> <td>C16 = 1600A, AC-3 C20 = 2000A, AC-1</td> <td>R = 515 mm</td> <td></td> </tr> </table>			<b>Current Ratings, AC-3</b>	<b>Frame Size Designation</b>	<b>Built-In Auxiliary Contact</b>	007 = 7A 009 = 9A 012 = 12A 015 = 15A	B = 45 mm	01 = 1NC 10 = 1NO	018 = 18A 025 = 25A 032 = 32A	C = 45 mm		040 = 40A 050 = 50A 065 = 65A 072 = 72A	D = 55 mm	00 = 0NO-0NC S1 = 1NO-1NC Side-mount Auxiliary S2 = 2NO-2NC Side-mount Auxiliary	080 = 80A 095 = 95A	F = 90 mm	11 = 1NO-1NC Top-mount Auxiliary	115 = 115A 150 = 150A 170 = 170A	G = 90 mm		185 = 185A 225 = 225A 250 = 250A	L = 140 mm	22 = 2NO-2NC	300 = 300A 400 = 400A 500 = 500A 570 = 580A	M = 160 mm		580 = 580A 650 = 650A 750 = 750A 820 = 820A C10 = 1000A	N = 250 mm		C14 = 1400A, AC-1	P = 260 mm		C16 = 1600A, AC-3 C20 = 2000A, AC-1	R = 515 mm														
<b>Current Ratings, AC-3</b>	<b>Frame Size Designation</b>	<b>Built-In Auxiliary Contact</b>																																														
007 = 7A 009 = 9A 012 = 12A 015 = 15A	B = 45 mm	01 = 1NC 10 = 1NO																																														
018 = 18A 025 = 25A 032 = 32A	C = 45 mm																																															
040 = 40A 050 = 50A 065 = 65A 072 = 72A	D = 55 mm	00 = 0NO-0NC S1 = 1NO-1NC Side-mount Auxiliary S2 = 2NO-2NC Side-mount Auxiliary																																														
080 = 80A 095 = 95A	F = 90 mm	11 = 1NO-1NC Top-mount Auxiliary																																														
115 = 115A 150 = 150A 170 = 170A	G = 90 mm																																															
185 = 185A 225 = 225A 250 = 250A	L = 140 mm	22 = 2NO-2NC																																														
300 = 300A 400 = 400A 500 = 500A 570 = 580A	M = 160 mm																																															
580 = 580A 650 = 650A 750 = 750A 820 = 820A C10 = 1000A	N = 250 mm																																															
C14 = 1400A, AC-1	P = 260 mm																																															
C16 = 1600A, AC-3 C20 = 2000A, AC-1	R = 515 mm																																															
<table border="1"> <tr> <td colspan="2"><b>XTAE, XTAS and XTAR Starters Only — Maximum Overload Relay</b></td> </tr> <tr> <td colspan="2"><b>XTOB Maximum Overload Rating</b></td> </tr> <tr> <td><i>Frame B</i></td> <td><i>Frame D</i></td> </tr> <tr> <td>P16 = 0.1 – 0.16A P24 = 0.16 – 0.24A P40 = 0.24 – 0.4A P60 = 0.4 – 0.6A 001 = 0.6 – 1A 1P6 = 1.0 – 1.6A 2P4 = 1.6 – 2.4A 004 = 2.4 – 4A 006 = 4 – 6A 010 = 6 – 10A 012 = 9 – 12A 016 = 12 – 16A</td> <td>010 = 6 – 10A 016 = 10 – 16A 024 = 16 – 24A 040 = 24 – 40A 057 = 40 – 57A 065 = 50 – 65A 075 = 65 – 75A</td> </tr> <tr> <td><i>Frame C</i></td> <td><i>Frame F</i></td> </tr> <tr> <td>P16 = 0.1 – 0.16A P24 = 0.16 – 0.24A P40 = 0.24 – 0.4A P60 = 0.4 – 0.6A 001 = 0.6 – 1A 1P6 = 1.0 – 1.6A 2P4 = 1.6 – 2.4A 004 = 2.4 – 4A 006 = 4 – 6A 010 = 6 – 10A 016 = 10 – 16A 024 = 16 – 24A 032 = 24 – 32A</td> <td>035 = 25 – 35A 050 = 35 – 50A 070 = 50 – 70A 100 = 70 – 100A</td> </tr> <tr> <td></td> <td><i>Frame G</i></td> </tr> <tr> <td></td> <td>035 = 25 – 35A 050 = 35 – 50A 070 = 50 – 70A 100 = 70 – 100A 125 = 95 – 125A 150 = 120 – 150A 175 = 145 – 175A</td> </tr> <tr> <td></td> <td><i>Frame L</i></td> </tr> <tr> <td></td> <td>070 = 50 – 70A 100 = 70 – 100A 125 = 95 – 125A 160 = 120 – 160A 220 = 160 – 220A 250 = 200 – 250A</td> </tr> </table>			<b>XTAE, XTAS and XTAR Starters Only — Maximum Overload Relay</b>		<b>XTOB Maximum Overload Rating</b>		<i>Frame B</i>	<i>Frame D</i>	P16 = 0.1 – 0.16A P24 = 0.16 – 0.24A P40 = 0.24 – 0.4A P60 = 0.4 – 0.6A 001 = 0.6 – 1A 1P6 = 1.0 – 1.6A 2P4 = 1.6 – 2.4A 004 = 2.4 – 4A 006 = 4 – 6A 010 = 6 – 10A 012 = 9 – 12A 016 = 12 – 16A	010 = 6 – 10A 016 = 10 – 16A 024 = 16 – 24A 040 = 24 – 40A 057 = 40 – 57A 065 = 50 – 65A 075 = 65 – 75A	<i>Frame C</i>	<i>Frame F</i>	P16 = 0.1 – 0.16A P24 = 0.16 – 0.24A P40 = 0.24 – 0.4A P60 = 0.4 – 0.6A 001 = 0.6 – 1A 1P6 = 1.0 – 1.6A 2P4 = 1.6 – 2.4A 004 = 2.4 – 4A 006 = 4 – 6A 010 = 6 – 10A 016 = 10 – 16A 024 = 16 – 24A 032 = 24 – 32A	035 = 25 – 35A 050 = 35 – 50A 070 = 50 – 70A 100 = 70 – 100A		<i>Frame G</i>		035 = 25 – 35A 050 = 35 – 50A 070 = 50 – 70A 100 = 70 – 100A 125 = 95 – 125A 150 = 120 – 150A 175 = 145 – 175A		<i>Frame L</i>		070 = 50 – 70A 100 = 70 – 100A 125 = 95 – 125A 160 = 120 – 160A 220 = 160 – 220A 250 = 200 – 250A																										
<b>XTAE, XTAS and XTAR Starters Only — Maximum Overload Relay</b>																																																
<b>XTOB Maximum Overload Rating</b>																																																
<i>Frame B</i>	<i>Frame D</i>																																															
P16 = 0.1 – 0.16A P24 = 0.16 – 0.24A P40 = 0.24 – 0.4A P60 = 0.4 – 0.6A 001 = 0.6 – 1A 1P6 = 1.0 – 1.6A 2P4 = 1.6 – 2.4A 004 = 2.4 – 4A 006 = 4 – 6A 010 = 6 – 10A 012 = 9 – 12A 016 = 12 – 16A	010 = 6 – 10A 016 = 10 – 16A 024 = 16 – 24A 040 = 24 – 40A 057 = 40 – 57A 065 = 50 – 65A 075 = 65 – 75A																																															
<i>Frame C</i>	<i>Frame F</i>																																															
P16 = 0.1 – 0.16A P24 = 0.16 – 0.24A P40 = 0.24 – 0.4A P60 = 0.4 – 0.6A 001 = 0.6 – 1A 1P6 = 1.0 – 1.6A 2P4 = 1.6 – 2.4A 004 = 2.4 – 4A 006 = 4 – 6A 010 = 6 – 10A 016 = 10 – 16A 024 = 16 – 24A 032 = 24 – 32A	035 = 25 – 35A 050 = 35 – 50A 070 = 50 – 70A 100 = 70 – 100A																																															
	<i>Frame G</i>																																															
	035 = 25 – 35A 050 = 35 – 50A 070 = 50 – 70A 100 = 70 – 100A 125 = 95 – 125A 150 = 120 – 150A 175 = 145 – 175A																																															
	<i>Frame L</i>																																															
	070 = 50 – 70A 100 = 70 – 100A 125 = 95 – 125A 160 = 120 – 160A 220 = 160 – 220A 250 = 200 – 250A																																															
<table border="1"> <tr> <td colspan="2"><b>C396 Maximum Overload Rating</b></td> </tr> <tr> <td colspan="2"><b>Suffix</b></td> </tr> <tr> <td colspan="2"><b>Std. Class 5/10/20/30</b></td> </tr> <tr> <td><i>Frame B</i></td> <td></td> </tr> <tr> <td>0.1 – 0.5A =</td> <td>3EP05</td> </tr> <tr> <td>0.4 – 2.0A =</td> <td>3E002</td> </tr> <tr> <td>1 – 5A =</td> <td>3E005</td> </tr> <tr> <td>1.6 – 8A =</td> <td>3E008</td> </tr> <tr> <td>6.4 – 32 =</td> <td>3E032</td> </tr> <tr> <td><i>Frame C</i></td> <td></td> </tr> <tr> <td>0.1 – 0.5A =</td> <td>3EP05</td> </tr> <tr> <td>0.4 – 2.0A =</td> <td>3E002</td> </tr> <tr> <td>1 – 5A =</td> <td>3E005</td> </tr> <tr> <td>1.6 – 8A =</td> <td>3E008</td> </tr> <tr> <td>6.4 – 32A =</td> <td>3E032</td> </tr> <tr> <td><i>Frame D</i></td> <td></td> </tr> <tr> <td>6.4 – 32A =</td> <td>3E032</td> </tr> <tr> <td>9 – 45A =</td> <td>3E045</td> </tr> <tr> <td>15 – 75A =</td> <td>3E075</td> </tr> <tr> <td><i>Frame F</i></td> <td></td> </tr> <tr> <td>22 – 110A =</td> <td>3E110</td> </tr> <tr> <td><i>Frame G</i></td> <td></td> </tr> <tr> <td>30 – 150A =</td> <td>3E150</td> </tr> </table>			<b>C396 Maximum Overload Rating</b>		<b>Suffix</b>		<b>Std. Class 5/10/20/30</b>		<i>Frame B</i>		0.1 – 0.5A =	3EP05	0.4 – 2.0A =	3E002	1 – 5A =	3E005	1.6 – 8A =	3E008	6.4 – 32 =	3E032	<i>Frame C</i>		0.1 – 0.5A =	3EP05	0.4 – 2.0A =	3E002	1 – 5A =	3E005	1.6 – 8A =	3E008	6.4 – 32A =	3E032	<i>Frame D</i>		6.4 – 32A =	3E032	9 – 45A =	3E045	15 – 75A =	3E075	<i>Frame F</i>		22 – 110A =	3E110	<i>Frame G</i>		30 – 150A =	3E150
<b>C396 Maximum Overload Rating</b>																																																
<b>Suffix</b>																																																
<b>Std. Class 5/10/20/30</b>																																																
<i>Frame B</i>																																																
0.1 – 0.5A =	3EP05																																															
0.4 – 2.0A =	3E002																																															
1 – 5A =	3E005																																															
1.6 – 8A =	3E008																																															
6.4 – 32 =	3E032																																															
<i>Frame C</i>																																																
0.1 – 0.5A =	3EP05																																															
0.4 – 2.0A =	3E002																																															
1 – 5A =	3E005																																															
1.6 – 8A =	3E008																																															
6.4 – 32A =	3E032																																															
<i>Frame D</i>																																																
6.4 – 32A =	3E032																																															
9 – 45A =	3E045																																															
15 – 75A =	3E075																																															
<i>Frame F</i>																																																
22 – 110A =	3E110																																															
<i>Frame G</i>																																																
30 – 150A =	3E150																																															
<table border="1"> <tr> <td><b>Coil Codes</b></td> </tr> <tr> <td>See Table 34-58.</td> </tr> </table>			<b>Coil Codes</b>	See Table 34-58.																																												
<b>Coil Codes</b>																																																
See Table 34-58.																																																

**Dimensions**

**XTCE Contactors (3-Pole)**

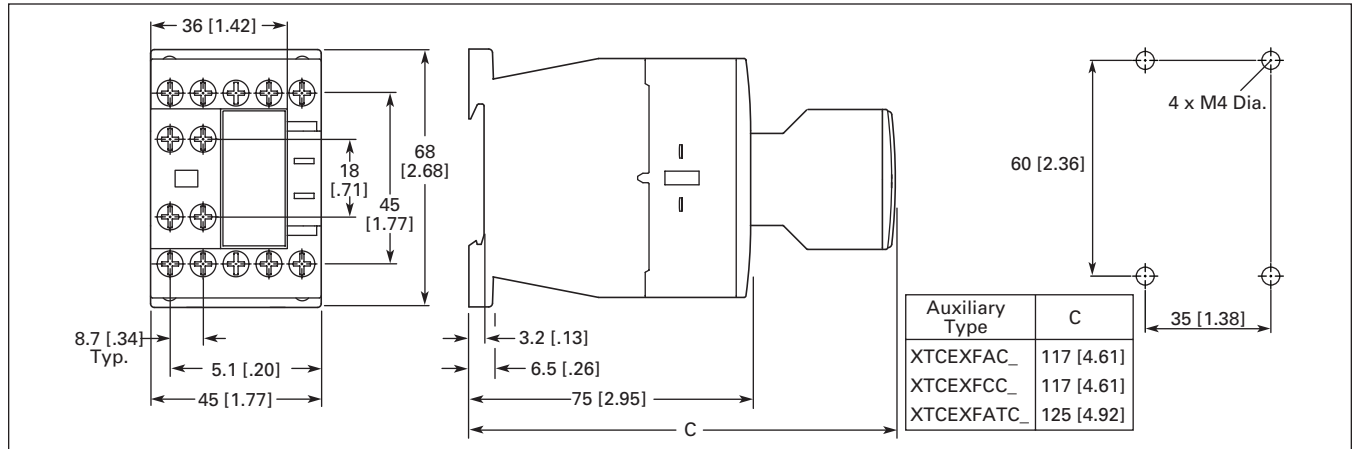


Figure 34-46. Frame B, XTCE007B and XTCE015B Contactors with Screw Terminals (7 – 15A) XTCE020B — Approximate Dimensions in mm [in]

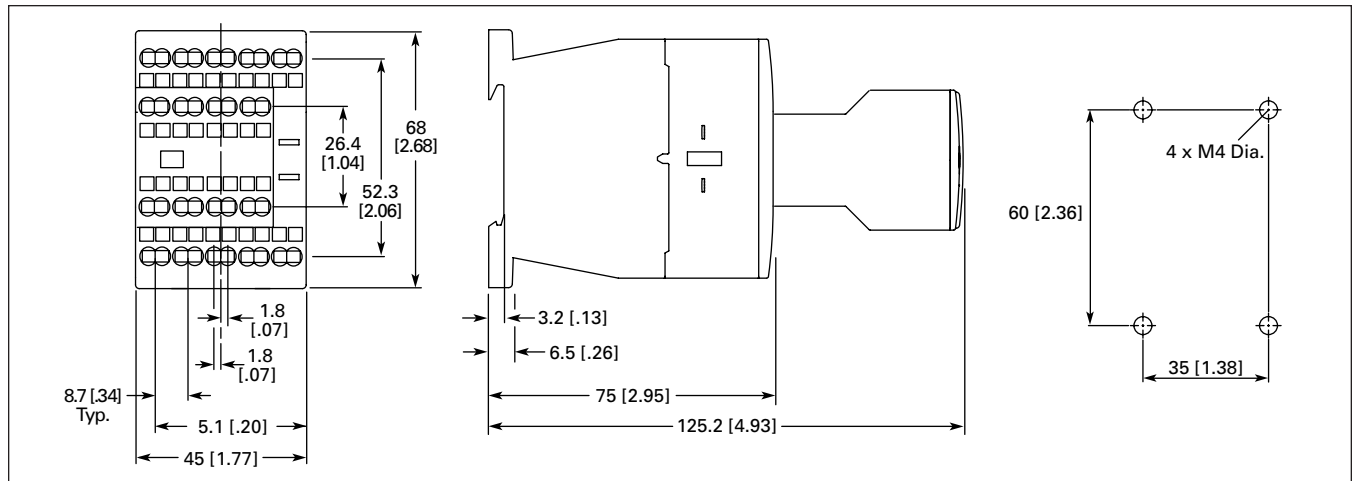


Figure 34-47. Frame B, XTCEC007B – XTCEC012B Contactors with Spring Cage Terminals (7 – 12A) — Approximate Dimensions in mm [in]

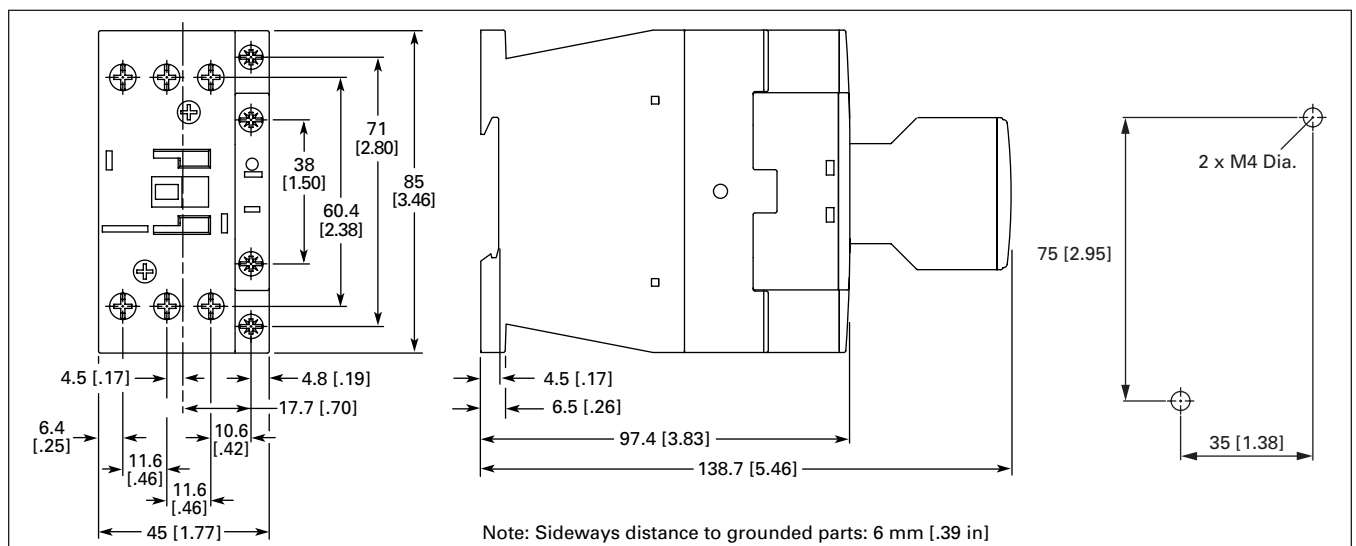


Figure 34-48. Frame C, XTCE018C – XTCE032C Contactors (18 – 32A) — Approximate Dimensions in mm [in]