



Powering Business Worldwide"

Similar to illustration

Delivery programme Basic function Miniature circuit breakers Number of poles 3 pole+N В Tripping characteristic Application Switchgear for industrial and advanced commercial applications Rated current А 25 I_n Rated switching capacity acc. to IEC/EN 60947-2 kA 15 Product range FAZ

Technical data

Electrical

Standards			IEC/EN 60947-2 IEC/EN 60898
Rated operational voltage	Ue	V	
	U _e	V AC	230/400
		V DC	48 (per pole)
Rated switching capacity acc. to IEC/EN 60947-2		kA	15
Operational switching capacity		kA	7.5
Characteristic			B, C, D
Max. back-up fuse		A gL/gG	125
Selectivity Class			3
Lifespan	Operations		> 10000
Direction of incoming supply			as required
Mechanical			
Standard front dimension		mm	45
Enclosure height		mm	80
Terminal protection			Finger and back-of-hand proof to BGV A2
Mounting width per pole		mm	17.5
Mounting			IEC/EN 60715 top-hat rail
Degree of Protection			IP20, IP40 (when fitted)
Terminals top and bottom			Twin-purpose terminals
Terminal capacities		mm ²	
		mm ²	1 x 25
		mm ²	2 x 10
Thickness of busbar material		mm	0.8 2
Mounting position			As required

Design verification as per IEC/EN 61439

Rated operational current for specified heat dissipationInA25Heat dissipation per pole, current-dependentPvidV0Equipment heat dissipation, current-dependentPvidV9.7Static heat dissipation, non-current-dependentPvsV0Heat dissipation capacityPdissV0Operating ambient temperature min.C-40Operating ambient temperature max.C-75	chnical data for design verification			
Equipment heat dissipation, current-dependent Pvid W 9.7 Static heat dissipation, non-current-dependent Pvs W 0 Heat dissipation capacity Pdiss W 0 Operating ambient temperature min. r °C 40	Rated operational current for specified heat dissipation	I _n	A	25
Static heat dissipation, non-current-dependent Pvs W O Heat dissipation capacity Pdiss W 0 Operating ambient temperature min. C C 40	Heat dissipation per pole, current-dependent	P _{vid}	W	0
Heat dissipation capacity P _{diss} W 0 Operating ambient temperature min. °C -40	Equipment heat dissipation, current-dependent	P _{vid}	W	9.7
Operating ambient temperature min. °C -40	Static heat dissipation, non-current-dependent	P _{vs}	W	0
	Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature max. °C 75	Operating ambient temperature min.		°C	-40
	Operating ambient temperature max.		°C	75


linear, per +1 °C, results in a 0.5% reduction of current carrying capacity


C/EN 61439 design verification	
10.2 Strength of materials and parts	
10.2.2 Corrosion resistance	Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 6.0


Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)	Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)				
Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB) (ecl@ss8.1-27-14-19-01 [AAB905011])					
Release characteristic		В			
Number of poles (total)		4			
Number of protected poles		4			
Nominal rated current	А	25			
Nominal rated voltage	V	400			
Rated short-circuit breaking capacity Icn EN 60898 at 230 V	kA	10			
Rated short-circuit breaking capacity Icn EN 60898 at 400 V	kA	10			
Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V	kA	15			
Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V	kA	15			
Voltage type		AC			
Current limiting class		3			
Frequency	Hz	50 - 60			
Concurrently switching N-neutral		Yes			
Suitable for flush-mounted installation		No			
Over voltage category		3			
Pollution degree		2			
Width in number of modular spacings		4			
Built-in depth	mm	70.5			
Additional equipment possible		Yes			
Degree of protection (IP)		IP20			




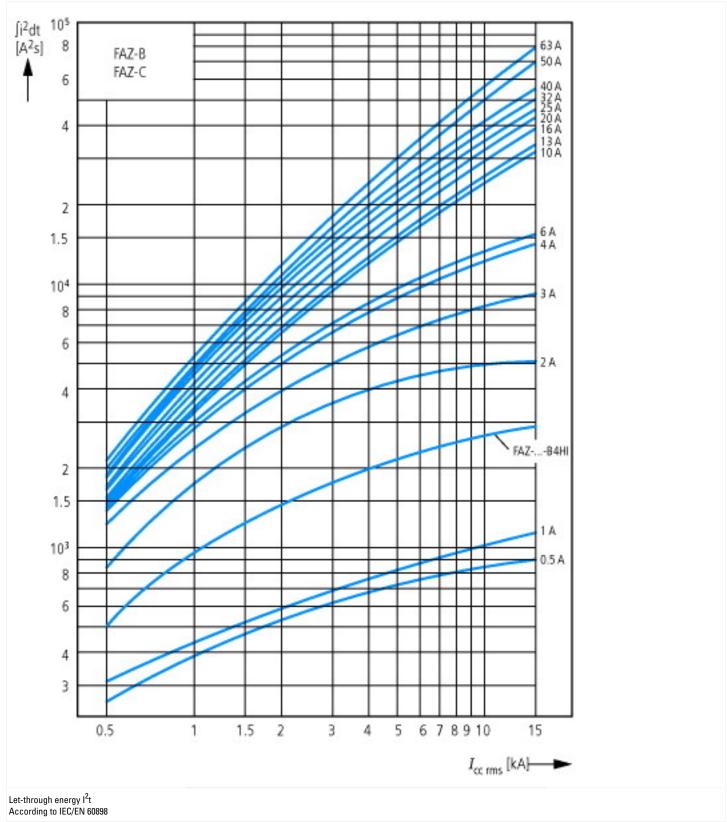

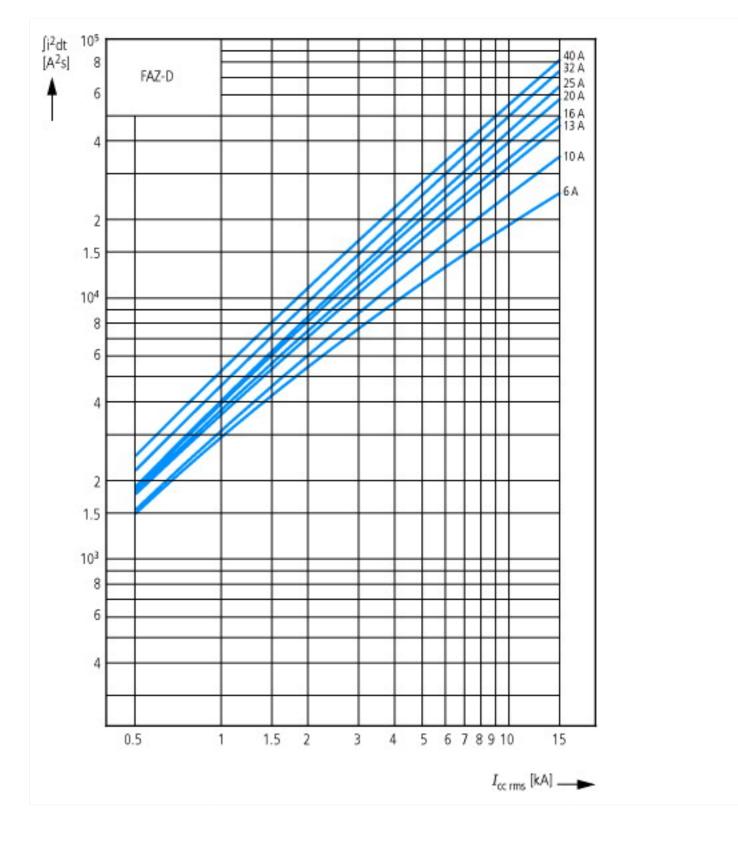


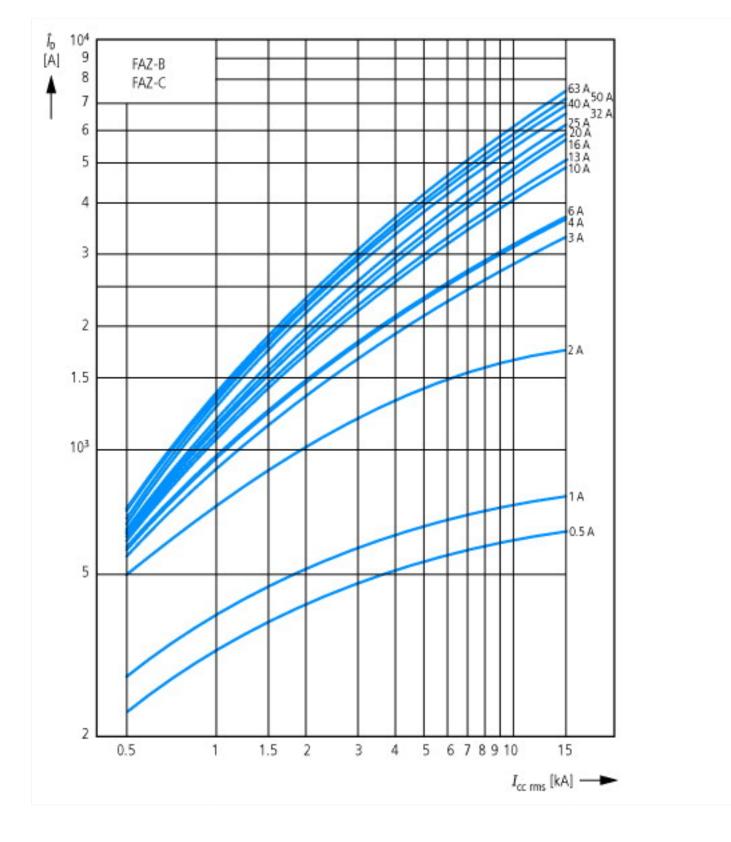

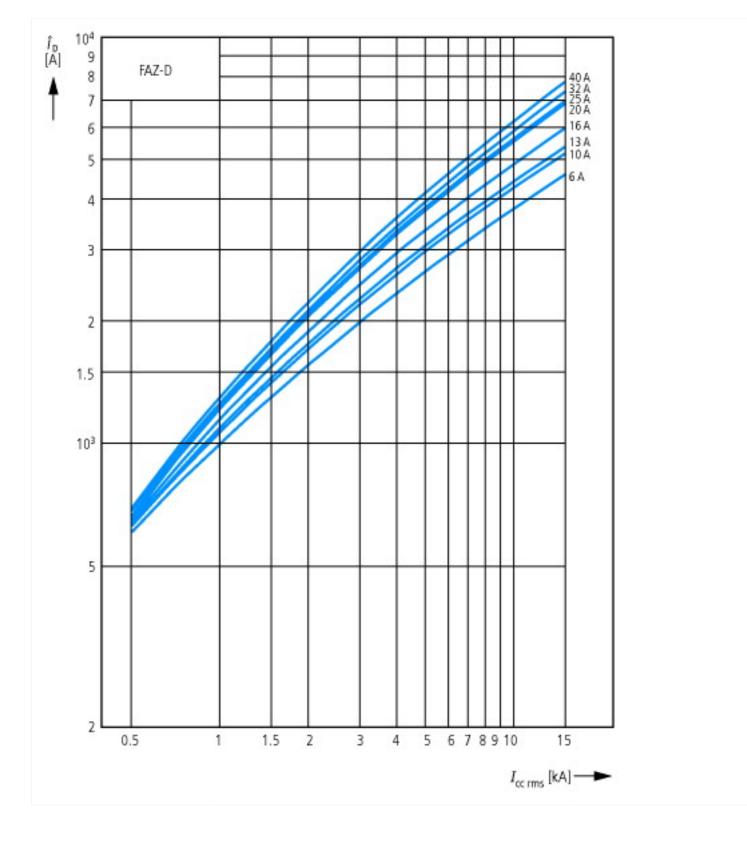

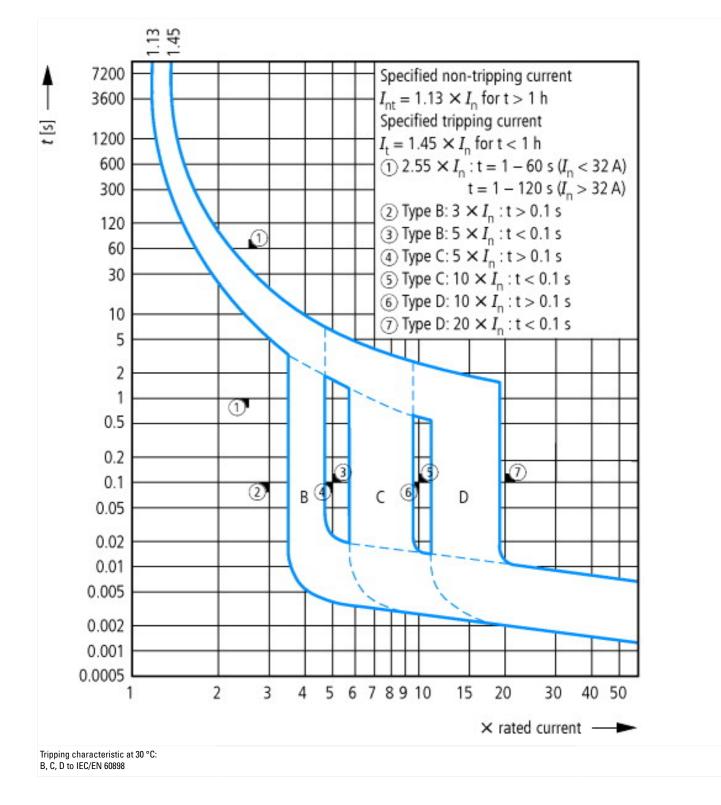

Dimensions

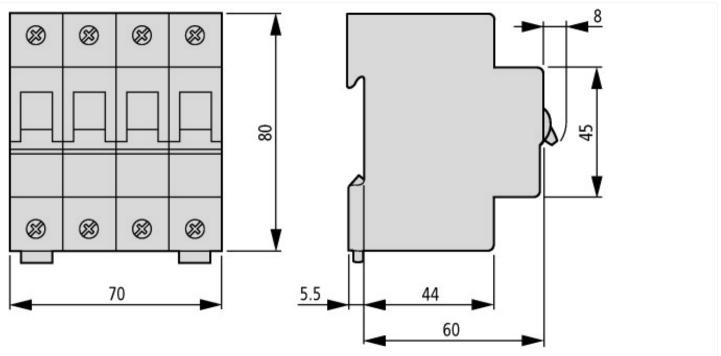

Additional product information (links)

AWA1220-1755 Circiut-breaker

AWA1220-1755 Circiut-breaker

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17550701.pdf