



## Over current switch, 2A, 2p, K-Char, AC

**Part no.** FAZ-K2/2  
**Article no.** 278791  
**Catalog No.** FAZ-K2/2

Similar to illustration

## Delivery programme

|   |       |    |  |
|---|-------|----|--|
| Basic function                                  |       |    | Miniature circuit breakers                                     |
| Number of poles                                 |       |    | 2 pole   |
| Tripping characteristic                         |       |    | K  |
| Application                                     |       |    | Switchgear for industrial and advanced commercial applications |
| Rated current                                   | $I_n$ | A  | 2  |
| Rated switching capacity acc. to IEC/EN 60947-2 |       | kA | 15   |
| Product range                                   |       |    | FAZ  |

## Technical data

### Electrical

|   |            |         |                                |
|---|------------|---------|--------------------------------|
| Standards                                       |            |         | IEC/EN 60947-2<br>IEC/EN 60898 |
| Rated operational voltage                       | $U_e$      | V       |                                |
|   |            | V AC    | 230/400                        |
|   |            | V DC    | 48 (per pole)                  |
| Rated switching capacity acc. to IEC/EN 60947-2 |            | kA      | 15                             |
| Operational switching capacity                  |            | kA      | 7.5                            |
| Characteristic                                  |            |         | B, C, D                        |
| Max. back-up fuse                               |            | A gL/gG | 125                            |
| Selectivity Class                               |            |         | 3                              |
| Lifespan  | Operations |         | > 10000                        |
| Direction of incoming supply                    |            |         | as required                    |

### Mechanical

|                              |  |               |   |
|------------------------------|--|---------------|---|
| Standard front dimension     |  | mm            | 45                                      |
| Enclosure height             |  | mm            | 80                                      |
| Terminal protection          |  |               | Finger and back-of-hand proof to BGV A2 |
| Mounting width per pole      |  | mm            | 17.5                                    |
| Mounting                     |  |               | IEC/EN 60715 top-hat rail               |
| Degree of Protection         |  |               | IP20, IP40 (when fitted)                |
| Terminals top and bottom     |  |               | Twin-purpose terminals                  |
| Terminal capacities          |  | $\text{mm}^2$ |   |
|                              |  | $\text{mm}^2$ | 1 x 25                                  |
|                              |  | $\text{mm}^2$ | 2 x 10                                  |
| Thickness of busbar material |  | mm            | 0.8 ... 2                               |
| Mounting position            |  |               | As required                             |

## Design verification as per IEC/EN 61439

|  |            |    |     |
|--|------------|----|-----|
| Technical data for design verification                   |            |    |     |
| Rated operational current for specified heat dissipation | $I_n$      | A  | 2   |
| Heat dissipation per pole, current-dependent             | $P_{vid}$  | W  | 0   |
| Equipment heat dissipation, current-dependent            | $P_{vid}$  | W  | 2.9 |
| Static heat dissipation, non-current-dependent           | $P_{vs}$   | W  | 0   |
| Heat dissipation capacity                                | $P_{diss}$ | W  | 0   |
| Operating ambient temperature min.                       |            | °C | -40 |

**For Sales and Support call [KMParts.com](http://KMParts.com) (866) 595-9616**

|                                    |    |   |
|------------------------------------|----|---|
| Operating ambient temperature max. | °C | 75  |
|                                    |    | linear, per +1 °C, results in a 0.5% reduction of current carrying capacity |

## Technical data ETIM 6.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)

Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB) (ecI@ss8.1-27-14-19-01 [AAB905011])

|  |    |         |
|--|----|---------|
| Release characteristic   |    | K       |
| Number of poles (total)  |    | 2       |
| Number of protected poles                                      |    | 2       |
| Nominal rated current  | A  | 2       |
| Nominal rated voltage  | V  | 400     |
| Rated short-circuit breaking capacity Icn EN 60898 at 230 V    | kA | 0       |
| Rated short-circuit breaking capacity Icn EN 60898 at 400 V    | kA | 0       |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V | kA | 15      |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V | kA | 15      |
| Voltage type   |    | AC      |
| Current limiting class   |    | 3       |
| Frequency  | Hz | 50 - 60 |
| Concurrently switching N-neutral                               |    | No      |
| Suitable for flush-mounted installation                        |    | No      |
| Over voltage category  |    | 3       |
| Pollution degree   |    | 2       |
| Width in number of modular spacings                            |    | 2       |
| Built-in depth   | mm | 70.5    |
| Additional equipment possible                                  |    | Yes     |
| Degree of protection (IP)                                      |    | IP20    |

## Approvals

|                                  |  |  |
|----------------------------------|--|--|
| Product Standards                |  | IEC/EN 60947-2; IEC/EN 60898; UL 1077; CSA-C22.2 No. 235; CE marking |
| UL File No.                      |  | E177451  |
| UL Category Control No.          |  | QVNU2, QVNU8   |
| CSA File No.                     |  | 204453   |
| CSA Class No.                    |  | 3215-30  |
| North America Certification      |  | UL recognized, CSA certified   |
| Conditions of Acceptability      |  | Supplementary Protector only   |
| Suitable for                     |  | Branch Circuits; not as BCPD   |
| Current Limiting Circuit-Breaker |  | No   |
| Max. Voltage Rating              |  | 480Y/277 VAC; 96 VDC   |
| Degree of Protection             |  | IEC: IP20; UL/CSA Type: -  |


For Sales and Support call [KMParts.com](http://KMParts.com) (866) 595-9616

# Characteristics



Let-through energy  $i^2t$   
According to IEC/EN 60898

For Sales and Support call [KMParts.com](http://KMParts.com) (866) 595-9616

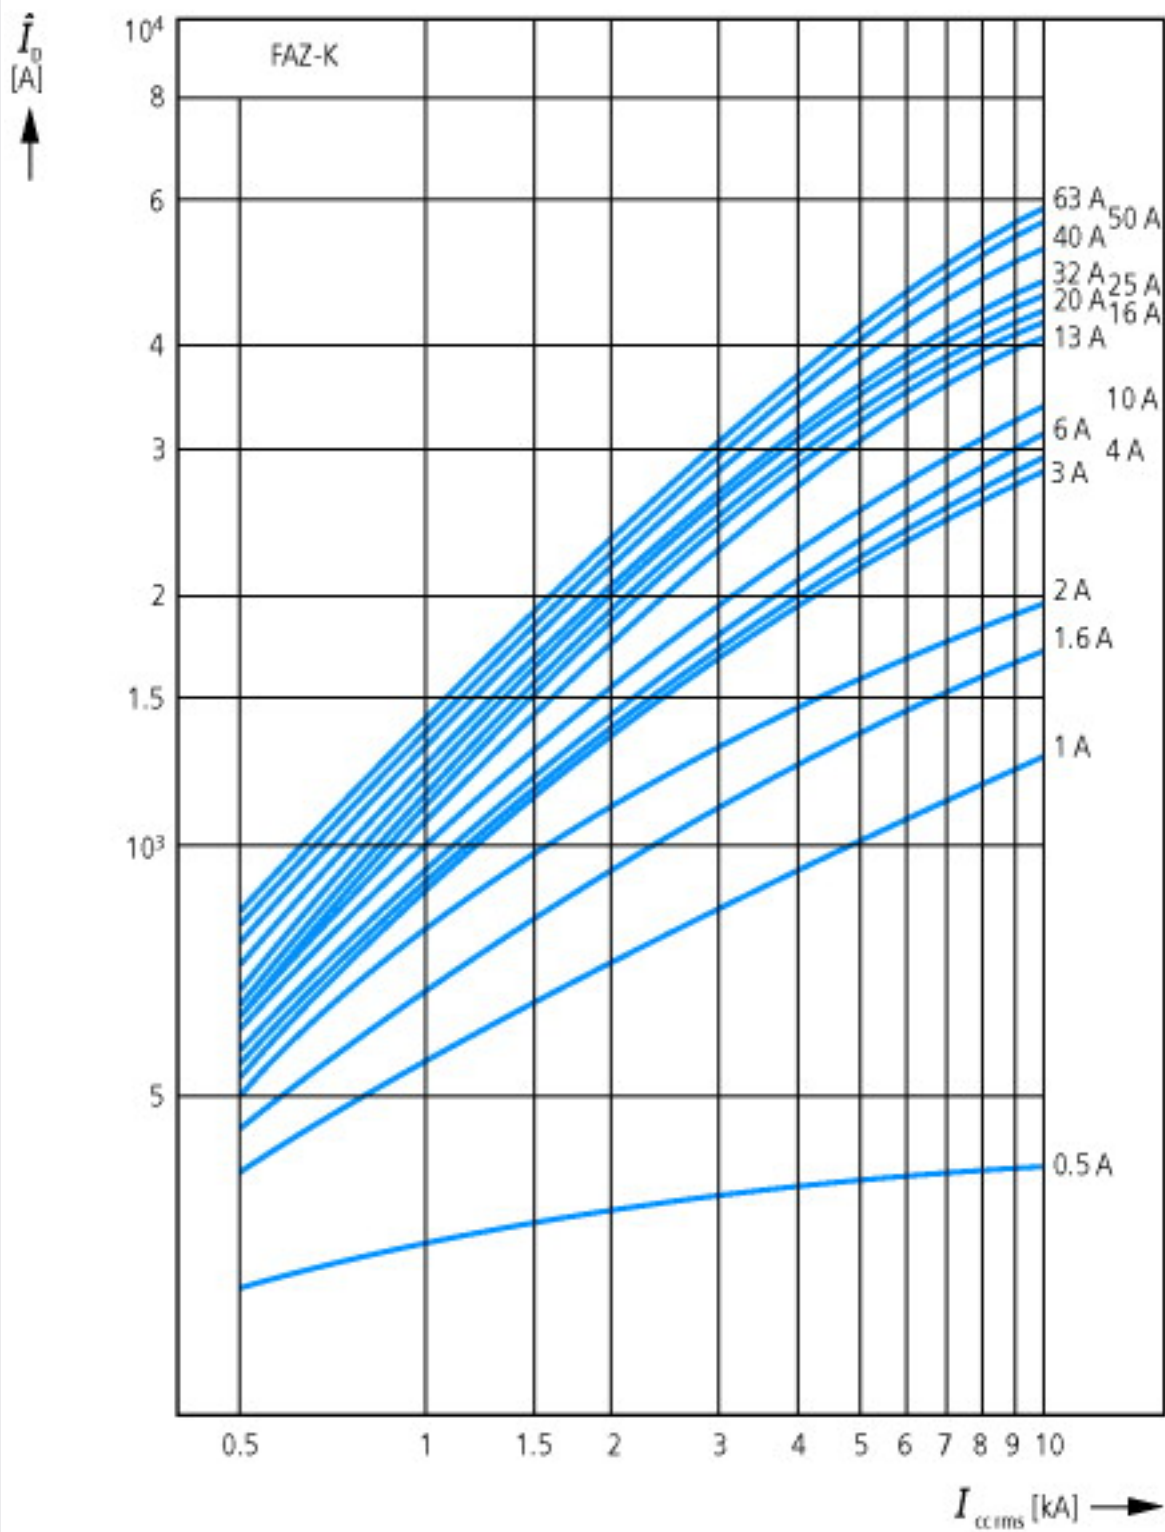

For Sales and Support call [KMParts.com](http://KMParts.com) (866) 595-9616




For Sales and Support call [KMParts.com](http://KMParts.com) (866) 595-9616




For Sales and Support call [KMParts.com](http://KMParts.com) (866) 595-9616



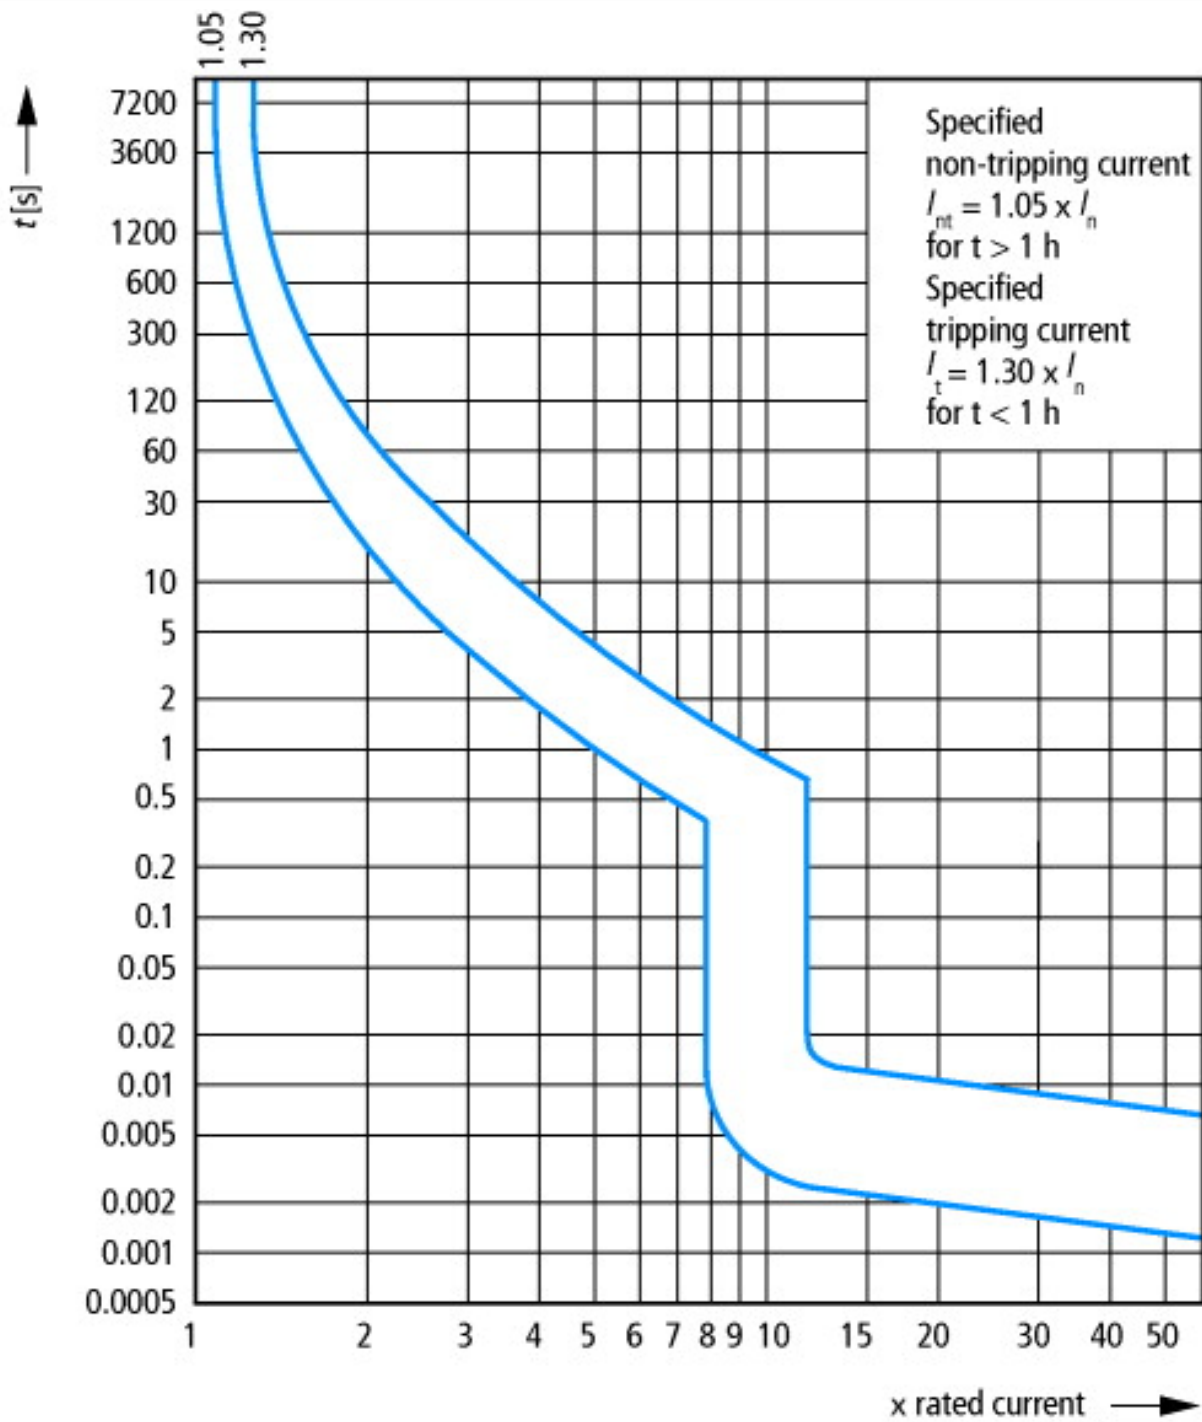

Tripping characteristic at 30 °C:  
 K according to IEC/EN 60947

## Dimensions

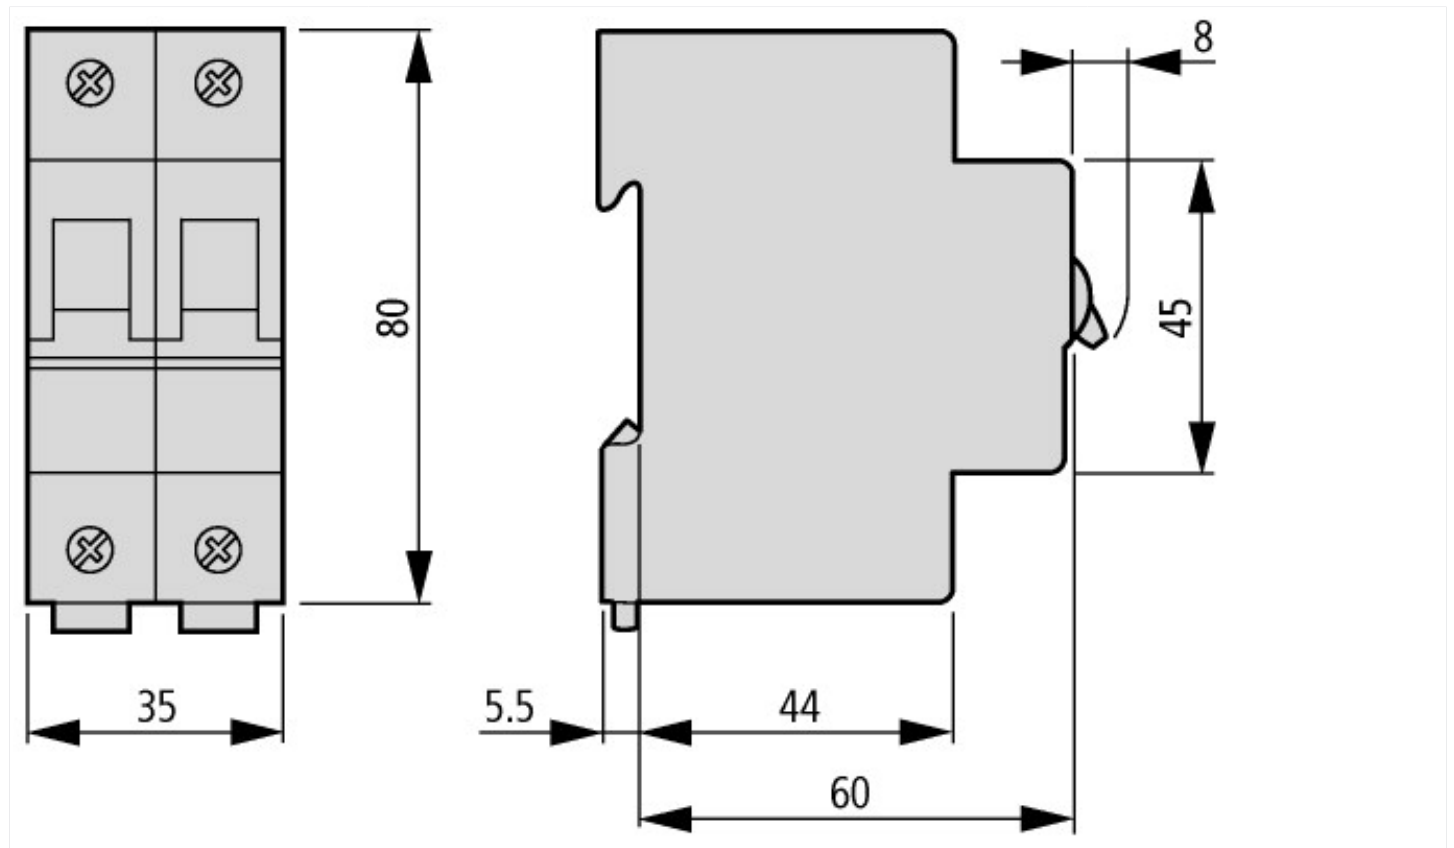

## Additional product information (links)

### AWA1220-1755 Circuit-breaker

AWA1220-1755 Circuit-breaker

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/17550701.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17550701.pdf)