

P3-30/EA/SVB(-SW)-MCS
P3-60/EA/SVB(-SW)-MCS
P3-90/EA/SVB(-SW)-MCS

P3-30/V/SVB(-SW)-MCS
P3-60/V/SVB(-SW)-MCS
P3-90/V/SVB(-SW)-MCS


**Electric current! Danger to life!**

Only skilled or instructed persons may carry out the following operations.

Tension électrique dangereuse !

Seules les personnes qualifiées et averties doivent exécuter les travaux ci-après.

P3-30/EA/SVB(-SW)-MCS
P3-60/EA/SVB(-SW)-MCS
P3-90/EA/SVB(-SW)-MCS

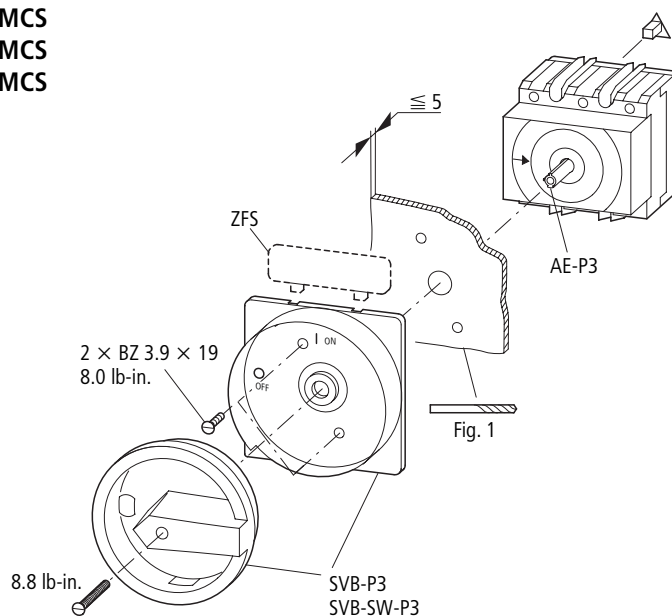

Manufactures code: 61693
 UL-File: E148671
 CSA-File: 1342868 (LR12528)

UL 489

Suitable for 10 kA, 480 V max. rms sym when protected by a Class H fuse rated 100 A maximum.

P3-30... = AWG14 – 2

P3-60... = AWG14 – 2







P3-90... = AWG14 – 2


75° Cu wire only,

Tightening torque 26.5 lb-in.

Caution: Does not provide over-current protection.

P3-30/V/SVB(-SW)-MCS
P3-60/V/SVB(-SW)-MCS
P3-90/V/SVB(-SW)-MCS


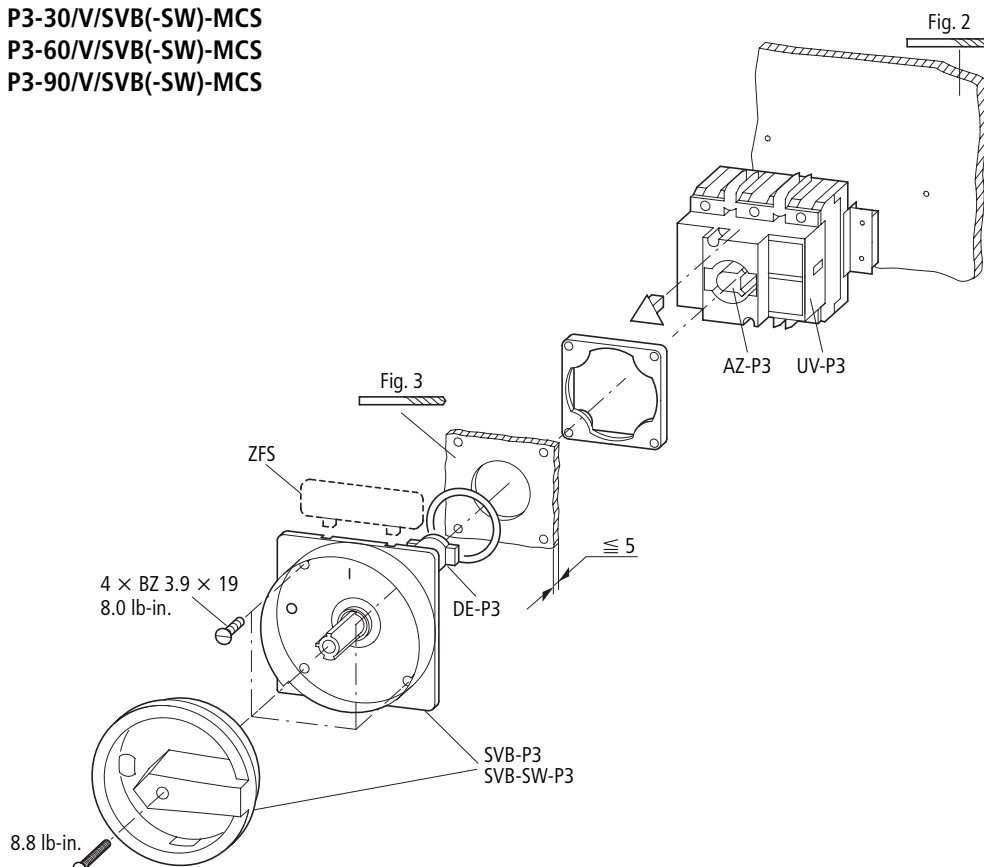


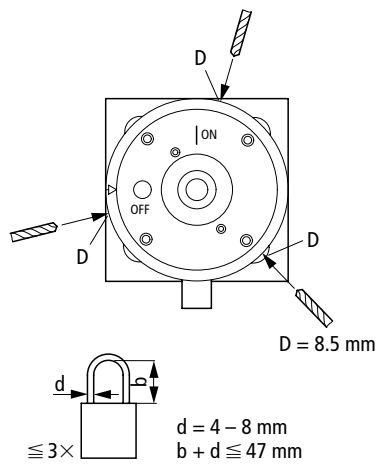

Only SVB-SW: Lockable in ON position
Warning!
Locking the red-yellow switch in ON position is forbidden!

SVB-SW uniquement: cadenassable en position ON (fermé)
Attention !
Cadenassage en position ON (fermé) interdit avec un appareil rouge-jaune !

Components drawn in broken lines are not included in the scope of delivery.
Les éléments représentés en pointillés ne font pas partie de la fourniture.

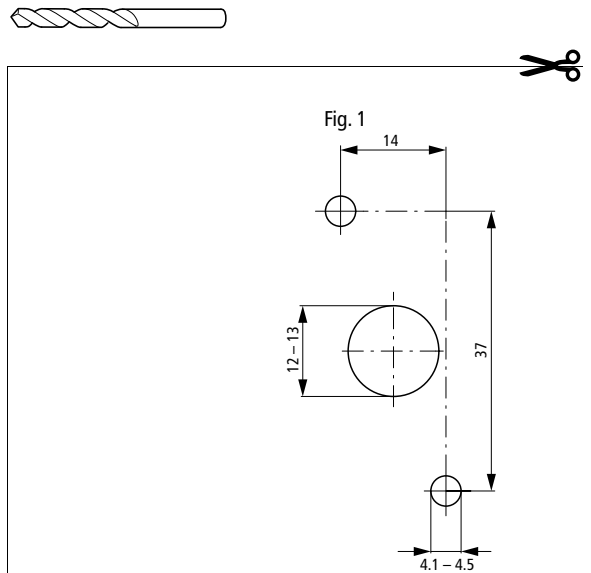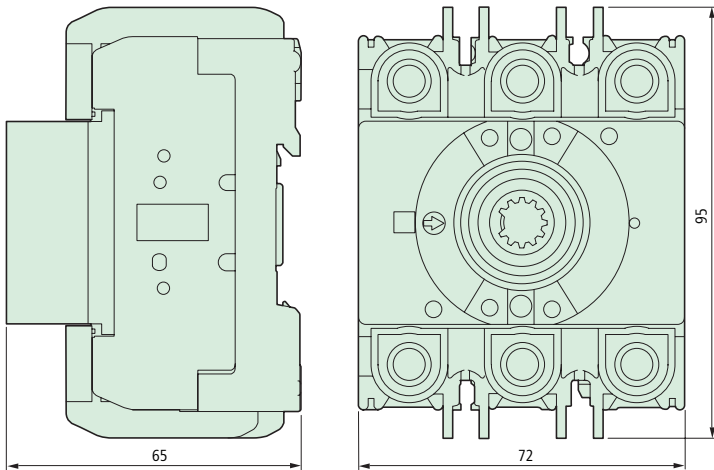

02/08 AWA1150-1994

