




Key-operated actuators			
IP 65, NEMA 13			
18 x 18 mm 2 positions	25 x 25 mm 2 positions	18 x 18 mm 3 positions	25 x 25 mm 3 positions
↘ 0 Q18S1 38806 ↘ 0,I Q18S1R 38805 ↘ 0 Q18S1R-A1 72312	↘ 0 Q25S1 38773 ↘ 0,I Q25S1R 38772 ↘ 0 Q25S1R-A1 72376	↘ 0 Q18S3 72313 ↘ 0,I,Q,II Q18S3R 72314 ↘ 0 Q18S3R-A1 72315 ↘ 0,I,Q Q18S3R-A2 72316 ↘ 0,I,Q Q18S3R-A3 72317 ↘ 0,I,Q Q18S3R-A4 72318 ↘ 0 Q18S3R-A5 72319 ↘ 0,I,Q Q18S3R-A6 72320 ↘ 0 Q18S3R-A7 72321	↘ 0 Q25S3 72337 ↘ 0,I,Q,II Q25S3R 72378 ↘ 0 Q25S3R-A1 72379 ↘ 0,I,Q Q25S3R-A2 72380 ↘ 0,I,Q Q25S3R-A3 72381 ↘ 0,I,Q Q25S3R-A4 72382 ↘ 0 Q25S3R-A5 72383 ↘ 0,I,Q Q25S3R-A6 72384 ↘ 0 Q25S3R-A7 72385

Selector switch actuators	
IP 65, NEMA 13	
18 x 18 mm 2 positions	25 x 25 mm 2 positions
↘ Q18WK1 36515 ↘ Q18WK1R 36598	↘ Q25WK1 36599 ↘ Q25WK1R 36600
3 positions	3 positions
↘ Q18WK3 72308 ↘ Q18WK3R 72309 ↘ Q18WK3R1 72310 ↘ Q18WK3R2 72311	↘ Q25WK3 72372 ↘ Q25WK3R 72373 ↘ Q25WK3R1 72374 ↘ Q25WK3R2 72375

↘ = Stay-put 45° ↘ = Spring-return 45° For further individual locking arrangements please enquire
 I,0,II = Key can be withdrawn in the positions indicated

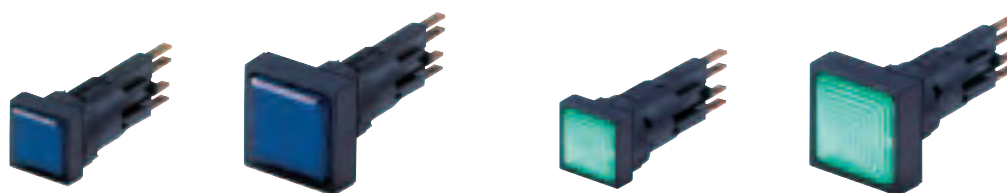

Indicator lights				
IP 65, NEMA 13 with 24 V filament lamp				
Lens	18 x 18 mm Flush	25 x 25 mm Flush	18 x 18 mm Extended	25 x 25 mm Extended
□ ■ ■ ■ ■	Q18LF-WS/WB 88059 Q18LF-GN/WB 87947 Q18LF-RT/WB 88001 Q18LF-GE/WB 87915 Q18LF-BL/WB 87860	Q25LF-WS/WB 89151 Q25LF-GN/WB 88828 Q25LF-RT/WB 89104 Q25LF-GE/WB 88798 Q25LF-BL/WB 88761	Q18LH-WS/WB 88535 Q18LH-GN/WB 88483 Q18LH-RT/WB 88507 Q18LH-GE/WB 88448 Q18LH-BL/WB 88424	Q25LH-WS/WB 90405 Q25LH-GN/WB 90312 Q25LH-RT/WB 90354 Q25LH-GE/WB 90285 Q25LH-BL/WB 90240