


Specifications



Photo is representative

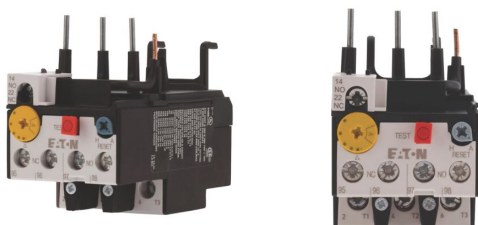

Eaton 278444

Eaton Moeller® series ZB Overload relay, ZB32, Ir= 0.24 - 0.4 A, 1 N/O, 1 N/C, Direct mounting, IP20

General specifications

PRODUCT NAME	Eaton Moeller® series ZB Thermal overload relay
---------------------	---

CATALOG NUMBER	278444
-----------------------	--------

MODEL CODE	ZB32-0,4
-------------------	----------

EAN	4015082784447
------------	---------------

PRODUCT LENGTH/DEPTH	96 mm
-----------------------------	-------

PRODUCT HEIGHT	67 mm
-----------------------	-------

PRODUCT WIDTH	45 mm
----------------------	-------

PRODUCT WEIGHT	0.141 kg
-----------------------	----------

CERTIFICATIONS

CSA-C22.2 No. 60947-4-1-14
IEC/EN 60947-4-1
IEC/EN 60947
CSA
CSA File No.: 012528
CSA Class No.: 3211-03
CE
UL Category Control No.: NKCR
UL
UL File No.: E29184
VDE 0660
UL 60947-4-1



Powering Business Worldwide

Features & Functions

FEATURES

Test/off button
Phase-failure sensitivity
(according to IEC/EN
60947, VDE 0660 Part 102)
Reset pushbutton
manual/auto
Trip-free release

General

**AMBIENT OPERATING
TEMPERATURE - MIN** -25 °C

**AMBIENT OPERATING
TEMPERATURE - MAX** 55 °C

**AMBIENT OPERATING
TEMPERATURE
(ENCLOSED) - MIN** 25 °C

**AMBIENT OPERATING
TEMPERATURE
(ENCLOSED) - MAX** 40 °C

CLASS CLASS 10 A

CLIMATIC PROOFING Damp heat, cyclic, to IEC
60068-2-30
Damp heat, constant, to
IEC 60068-2-78

DEGREE OF PROTECTION IP20

FRAME SIZE ZB32

MOUNTING METHOD Direct attachment
Direct mounting

**OVERLOAD RELEASE
CURRENT SETTING - MIN** 0.24 A

**OVERLOAD RELEASE
CURRENT SETTING - MAX** 0.4 A

**OVERVOLTAGE
CATEGORY** III

POLLUTION DEGREE 3

PRODUCT CATEGORY

- Accessories
- Overload relay ZB
up to 150 A

PROTECTION Finger and back-of-hand
proof, Protection against
direct contact when
actuated from front (EN
50274)

**RATED IMPULSE
WITHSTAND VOLTAGE
(UIMP)** 6000 V AC
4000 V (auxiliary and
control circuits)

SHOCK RESISTANCE 10 g, Mechanical,
Sinusoidal, Shock duration
10 ms

SUITABLE FOR Branch circuits, (UL/CSA)

**TEMPERATURE
COMPENSATION** ≤ 0.25 %/K, residual error
for T > 40°
Continuous

Terminal capacities

TERMINAL CAPACITY (FLEXIBLE WITH FERRULE)	1 x (1 - 4) mm ² , Main cables 2 x (1 - 4) mm ² , Main cables 1 x (0.75 - 2.5) mm ² , Control circuit cables 2 x (0.75 - 2.5) mm ² , Control circuit cables
TERMINAL CAPACITY (SOLID)	1 x (0.75 - 4) mm ² , Control circuit cables 2 x (1 - 6) mm ² , Main cables 2 x (0.75 - 4) mm ² , Control circuit cables 1 x (1 - 6) mm ² , Main cables
TERMINAL CAPACITY (SOLID/STRANDED AWG)	18 - 8, Main cables 2 x (18 - 14), Control circuit cables
STRIPPING LENGTH (MAIN CABLE)	10 mm
STRIPPING LENGTH (CONTROL CIRCUIT CABLE)	8 mm
SCREW SIZE	M4, Terminal screw M3.5, Terminal screw, Control circuit cables
SCREWDRIVER SIZE	1 x 6 mm, Terminal screw, Standard screwdriver 2, Terminal screw, Pozidriv screwdriver
TIGHTENING TORQUE	1.2 Nm, Screw terminals, Control circuit cables 1.8 Nm, Screw terminals, Main cables

Electrical rating

CONVENTIONAL THERMAL CURRENT ITH OF AUXILIARY CONTACTS (1-POLE, OPEN)	6 A
RATED OPERATIONAL CURRENT (IE) AT AC-15, 120 V	1.5 A
RATED OPERATIONAL CURRENT (IE) AT AC-15, 220 V, 230 V, 240 V	1.5 A
RATED OPERATIONAL CURRENT (IE) AT AC-15, 380 V, 400 V, 415 V	0.9 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 110 V	0.4 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 220 V, 230 V	0.2 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 24 V	0.9 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 60 V	0.75 A
RATED OPERATIONAL VOLTAGE (UE) - MAX	690 V
SAFE ISOLATION	440 V AC, Between main circuits, According to EN 61140 440 V, Between auxiliary contacts and main contacts, According to EN 61140 240 V AC, Between auxiliary contacts, According to EN 61140
SWITCHING CAPACITY (AUXILIARY CONTACTS, PILOT DUTY)	B600 at opposite polarity, AC operated (UL/CSA) R300, DC operated (UL/CSA) B300 at opposite polarity, AC operated (UL/CSA)
VOLTAGE RATING - MAX	600 VAC
VOLTAGE RATING - MAX	600 VAC

Short-circuit rating

SHORT-CIRCUIT CURRENT RATING (HIGH FAULT AT 600 V)	1 A, Class J/CC, max. Fuse, SCCR (UL/CSA) 100 kA, Fuse, SCCR (UL/CSA)
---	--

SHORT-CIRCUIT PROTECTION RATING	25 A gG/gL, Fuse, Type "1" coordination Max. 6 A gG/gL, fuse, Without welding, Auxiliary and control circuits 2 A gG/gL, Fuse, Type "2" coordination
--	--

Contacts

NUMBER OF AUXILIARY CONTACTS (CHANGE-OVER CONTACTS)	0
--	---

NUMBER OF AUXILIARY CONTACTS (NORMALLY CLOSED CONTACTS)	1
--	---

NUMBER OF AUXILIARY CONTACTS (NORMALLY OPEN CONTACTS)	1
--	---

NUMBER OF CONTACTS (NORMALLY CLOSED CONTACTS)	1
--	---

NUMBER OF CONTACTS (NORMALLY OPEN CONTACTS)	1
--	---

Design verification

EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID 5.4 W

HEAT DISSIPATION CAPACITY PDISS 0 W

HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID 1.8 W

RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN) 0.4 A

STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS 0 W

10.2.2 CORROSION RESISTANCE Meets the product standard's requirements.

10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES Meets the product standard's requirements.

10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT Meets the product standard's requirements.

10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS Meets the product standard's requirements.

10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION Meets the product standard's requirements.

10.2.5 LIFTING Does not apply, since the entire switchgear needs to be evaluated.

10.2.6 MECHANICAL IMPACT Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 INSCRIPTIONS Meets the product standard's requirements.

10.3 DEGREE OF PROTECTION OF ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated.

10.4 CLEARANCES AND CREEPAGE DISTANCES Meets the product standard's requirements.

10.5 PROTECTION AGAINST ELECTRIC SHOCK Does not apply, since the entire switchgear needs to be evaluated.

Resources

CATALOGS

[eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf](#)

[Product Range Catalog Switching and protecting motors](#)

CHARACTERISTIC CURVE

[eaton-tripping-devices-overload-relay-zb-overload-relay-characteristic-curve-002.eps](#)

[eaton-tripping-zb-overload-relay-characteristic-curve-002.eps](#)

DECLARATIONS OF CONFORMITY

[eaton-thermal-overload-relay-declaration-of-conformity-eu250786en.pdf](#)

[eaton-thermal-overload-relay-declaration-of-conformity-uk251269en.pdf](#)

DRAWINGS

[eaton-tripping-devices-zb-overload-relay-dimensions-002.eps](#)

[eaton-tripping-devices-overload-relay-zb-overload-relay-dimensions-004.eps](#)

[eaton-tripping-devices-overload-relay-zb-overload-relay-dimensions.eps](#)

[eaton-tripping-devices-overload-relay-zb-overload-relay-3d-drawing-002.eps](#)

ECAD MODEL

[DA-CE-ETN.ZB32-0,4](#)

INSTALLATION INSTRUCTIONS

[IL03407195Z](#)

[eaton-overload-relays-zb12-zb32-il03407015z.pdf](#)

MCAD MODEL

[DA-CD-zb32 DA-CS-zb32](#)

10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
10.10 TEMPERATURE RISE	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

WIRING DIAGRAMS

[eaton-tripping-devices-overload-relay-zb-overload-relay-wiring-diagram-003.eps](#)

PROJECT NAME:
PROJECT NUMBER:
PREPARED BY:
DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

