



Specifications

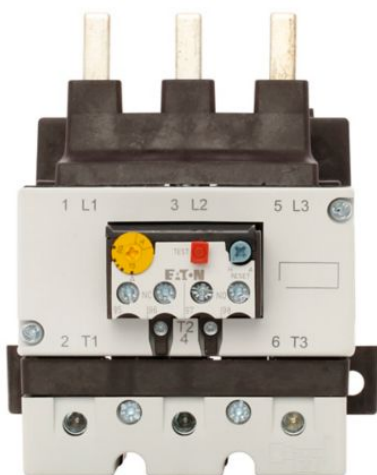

Eaton XTOB100GC1

Eaton XT IEC bimetallic overload relay, 70-100A overload range, 90 mm Frame size, 1NO-1NC contact configuration, Direct to contactor mounting, used with 80-170A contactor, 10A trip type

General specifications

PRODUCT NAME	Eaton XT IEC bimetallic overload relay
CATALOG NUMBER	XTOB100GC1
EAN	4015082784645
PRODUCT LENGTH/DEPTH	5.28 in
PRODUCT HEIGHT	5.43 in
PRODUCT WIDTH	4.65 in
PRODUCT WEIGHT	3.1 lb
COMPLIANCES	CE Marked ATEX Compliant RoHS Compliant
CERTIFICATIONS	UL Listed CSA Certified IEC 60947 EN 60947

Product specifications

OVERLOAD RANGE	70-100 A
FRAME SIZE	90 mm
MOUNTING	Direct

Resources

BROCHURES	C440 Electronic Overload Relay
CATALOGS	Motor Control and Protection, IEC Contactors and Starters, Volume 5, Tab 1
MULTIMEDIA	Overcurrent Protective Device Games - Fuses, Breakers and Contactors Explained
SPECIFICATIONS AND DATASHEETS	Eaton Specification Sheet - XTOB100GC1

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc

Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

